




## ZT400

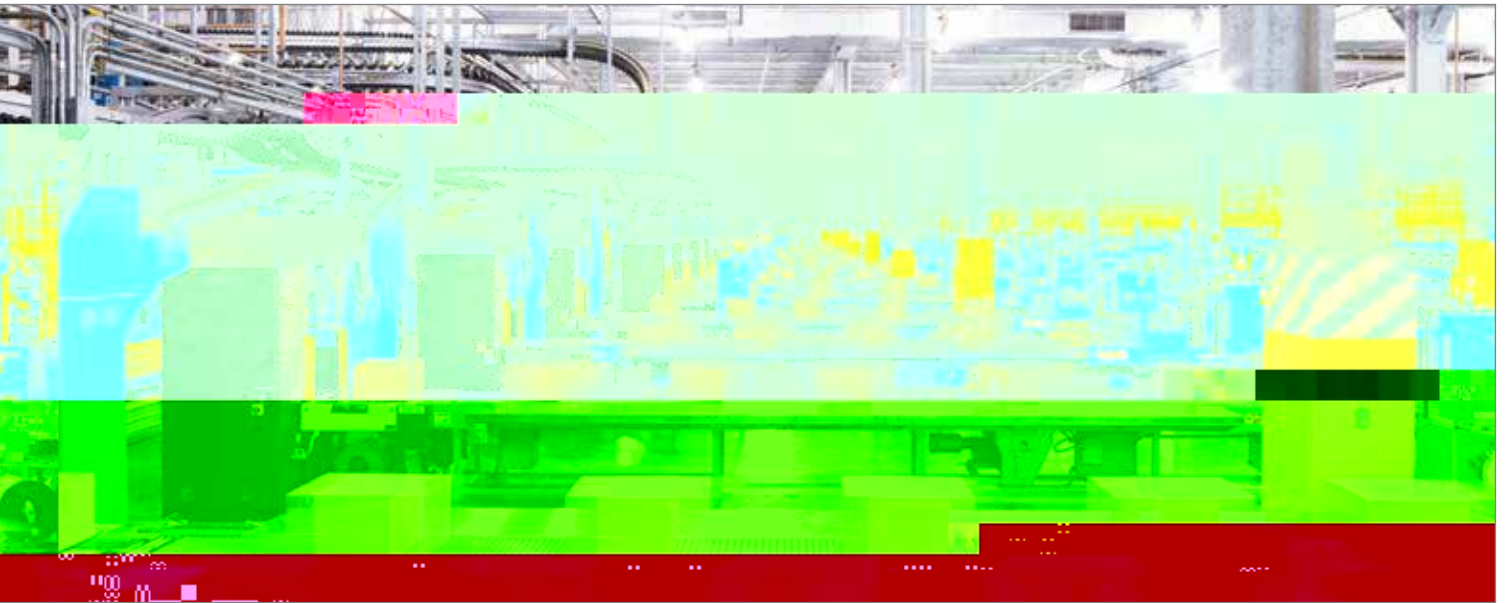

- 
- 
- USB
- RFID
- 
- 
- USB
- USB
- ZPL® EPL® Link-OS
- QR Web
- Print Touch™ (NFC) Link-OS Zebra
- 
- Zebra Link-OS
- Link-OS
- Profile Manager Link-OS

# ZT410™

# ZT420™

ZT400

ZT410

ZT420

	ZT410	ZT420
		
	4	6
	450	450
	14 ips	12 ips
	LCD	LCD
	203 300 600 dpi	203 300 dpi
	ZPL EPL	ZPL EPL



## ZEBRA ONECARE

ZEBRA ONECARE

ZEBRA

ZEBRA

## ZEBRA™

ZEBRA

- ZT400
- 
- 
- ISO 9001 2008

ZEBRA



ZT410 ZT420	<ul style="list-style-type: none"> <li>40~104°F/ 5~40°C</li> <li>32~104°F/ 0~40°C</li> <li>20~85%</li> </ul>	<ul style="list-style-type: none"> <li>ZebraNet® Webview Alert 802.11</li> </ul>
	/	a/b/g/n
<ul style="list-style-type: none"> <li>Element Energy Equalizer™ (E3™)</li> <li>USB 2.0 RS-232 10/100</li> <li>Bluetooth 2.1 USB LCD</li> <li>LED ENERGY STAR®</li> </ul>	<ul style="list-style-type: none"> <li>-40~140°F/ -40~60°C</li> <li>5%~85%</li> <li>PFC 100-100</li> <li>240VAC 50-60Hz ENERGY STAR®</li> <li>IEC 60950 EN 55022 Class B EN55024</li> <li>EN 61000-3-2 EN 61000-3-3 cTUVus CE Marking FCC-B ICES-003 VCCI C-Tick NOM S-Mark (Arg) CCC CU BSMI KCC SABS IN -Metro</li> </ul>	<ul style="list-style-type: none"> <li>3</li> <li>1</li> </ul>
<ul style="list-style-type: none"> <li>203dpi/ 8</li> <li>300dpi/ 12</li> <li>600dpi/ 24</li> </ul>	ZT410	RFID
<ul style="list-style-type: none"> <li>256MB RAM 4MB</li> <li>512MB 64MB</li> </ul>	ZT410: 1~4.5 / 25.4~114 /	<ul style="list-style-type: none"> <li>UHF EPC Gen 2 V1.2/ISO 18000-6C</li> <li>RFID 4 6</li> </ul>
ZT410 : 4.09 / 104	ZT420: 1~4.25 / 25.4~108 /	
ZT420 : 6.6 / 168	ZT420: 2~7 / 51~178 /	KDU Plus™ ZKDU
ZT410 : 14 ips/ 356	2~6.75 / 51~171 /	
ZT420 : 12 ips/ 305	39 / 991	/ /
ZT410: 203dpi 157 / 3988	ZT410(闭合状态) ZT420(闭合状态)	<ul style="list-style-type: none"> <li>16 ZPL II ZPL</li> <li>Unicode</li> <li>IBM Code Page 850 A B C, D E F G 0</li> <li>Code Page 1250 1252 1253 1254 1255 0</li> <li>Code 11 Code 39 Code 93 A/B/C CODE 128 UCC CASECODES ISBT-128 UPC-A UPC-E EAN-8 EAN-13 UPC and EAN 2- or 5-digit extensions Plessey Postnet Standard 2-of-5 Industrial 2-of-5 Interleaved 2-of-5 Logmars MSI Codabar Planet Code</li> <li>Codablock PDF417 Code 4 DataMatrix MaxiCode QR Code TLC 39 MicroPDF RSS-14 Aztec</li> </ul>
ZT420: 203dpi: 102 / 2590	10.6 / 269 13.25 / 337mm	
300dpi: 45 / 1143	12.75 / 324 12.75 / 324	
8 / 203 3	19.5 / 495 19.5 / 495	
/76	36 /16.33 40 /18.14	
0.0023~0.01 / 0.058~0.25		
	<b>LINK-OS</b>	
	Zebra	
	Zebra Zebra	
	Zebra	
450 3.2 /81.3		
1 /25.4		
1476 / 450		
ZT410 : 2~4.33 / 51~110		
ZT420 : 2~6.85 / 51~174		
	ZPL ZPL II® EPL	
	XML XML XML	



: [www.zebra.com](http://www.zebra.com)

: 4009201899

( : , contact.apac@zebra.com )

©2015 ZIH CORP. ZEBRA, ZEBRA, ZPL ZPL II ZIH CORP. ZT400 ENERGY STAR ENERGY STAR



上海途腾信息技术有限公司

技术及销售支持热线: 400-811-7372

地址: 上海市徐汇区田林路142号4楼401室

技术支援邮箱: tech@shntotem.com 价格咨询邮箱: sales@shntotem.com

PREMIER SOLUTION PARTNER